


## Cuscinetti conico 377-372-TIMKEN - 377-372-TIMKEN

<https://www.123cuscinetti.it/cuscinetti-supporti/cuscinetti-rulli/conico/377-372-timken>

**TAPERED ROLLER BEARINGS**  
SINGLE-ROW • TYPE TS

**TYPE TS**

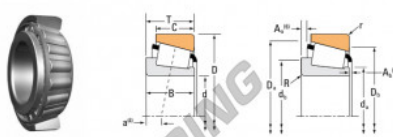

Bearing Dimensions			Load Ratings						Part Number	
Bore d	O.D. D	Width B	Dynamic <sup>(1)</sup> C <sub>1</sub>	Factor <sup>(2)</sup> e	Dynamic <sup>(1)</sup> C <sub>2</sub>	Factor <sup>(2)</sup> e <sub>2</sub>	Static C <sub>3</sub>	Inner	Outer	
mm	mm	mm	N		N		N			
52.387	100.000	24.999	104000	0.34	22000	10700	107000	377	372	
2.0625	3.9370	0.9842	23400		6070	3520	22700			

Bearing Dimensions										Geometry Factors			Bearing Weight	
Width B		ER. Dr. e <sup>(1)</sup>		Shaft		Housing		Cage		G <sub>1</sub>	G <sub>2</sub>	C <sub>1</sub>		
mm	mm	mm	mm	Max Shaft Fillet Radius R <sub>1</sub> <sup>(1)</sup>	Backing Shoulder Dia. d <sub>1</sub> <sup>(1)</sup>	Max Housing Fillet Radius r <sub>1</sub> <sup>(1)</sup>	Backing Shoulder Dia. D <sub>1</sub> <sup>(1)</sup>	A <sub>1</sub> <sup>(1)</sup>	A <sub>2</sub> <sup>(1)</sup>				kg	
22.225	21.824	-3.8	2.3	58.0	62.8	2.0	30.0	86.0	8.8	1.5	37.0	15.4	0.0818	0.83
0.8750	0.8592	-0.15	0.09	2.28	2.44	0.08	3.94	3.38	0.35	0.06				1.83

### CARATTERISTICHE DEL PRODOTTO

Marchio	TIMKEN
N° Ean13	3663952316697
Diametro interno	52.387 mm
Diametro interno	2 1/16" inch
Diametro esterno	100 mm
Diametro esterno	3.937" inch
Spessore	24.999 mm
Spessore	0.984" inch
Peso	500 g
Imballaggio	1
Standard	Nessuno standard

[contatto@123cuscinetti.it](mailto:contatto@123cuscinetti.it)

+33 3 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE