


Cuscinetti conico

HM911245-HM911210-TIMKEN - HM911245-HM911210-TIMKEN

<https://www.123cuscinetti.it/cuscinetti-supporti/cuscinetti-rulli/conico/hm911245-hm911210-timken>

TAPERED ROLLER BEARINGS
SINGLE-ROW • TYPE TS

TYPE TS

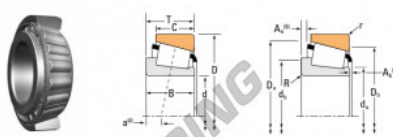

| Bearing Dimensions | | | Load Ratings | | | | | | Part Number | |
|--------------------|---------|---------|---|---------------------------|---|---------------------------|--|--------|-------------|----------|
| Bore d | O.D. D | Width T | Dynamic ¹⁾ C ₁ | Factor ²⁾ Y | Dynamic ³⁾ C ₂ | Factor ⁴⁾ X | Static ⁵⁾ C ₀ | Inner | Outer | |
| mm | mm | mm | N | | N | | N | | | |
| 60.325 | 130.175 | 36.512 | 100000 | 0.82 | 12200 | 77000 | 0.71 | 163000 | HM911245 | HM911210 |
| 2.3750 | 5.1250 | 1.4375 | 44400 | | 11500 | 16300 | | 41100 | | |

| Bearing Dimensions | | | | | | | | | | Geometry Factors | | | Bearing Weight | |
|--------------------|--------|---------------|--|--|--|--|------------------------------|------------------------------|----------------|------------------|----------------|------|----------------|------|
| Width | | ER. Co. μm | Shaft | | Housing | | Cage | | G ₁ | G ₂ | C ₃ | | | |
| B | C | | Max Shaft Fillet Radius R ₁ | Backing Shoulder Dia. d _s | Max Housing Fillet Radius r ₁ | Backing Shoulder Dia. D _s | A ₁ ⁶⁾ | A ₂ ⁷⁾ | | | | | | |
| mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | kg | |
| 33.338 | 23.812 | 5.3 | 5.8 | 74.8 | 55.8 | 3.3 | 123.8 | 108.8 | 7.3 | 4.3 | 55.4 | 16.5 | 0.0842 | 2.06 |
| 1.3125 | 0.9375 | 0.21 | 0.23 | 2.91 | 2.09 | 0.13 | 4.87 | 4.29 | 0.29 | 0.17 | | | | 4.55 |

CARATTERISTICHE DEL PRODOTTO

| | |
|------------------|---------------|
| Marchio | TIMKEN |
| N° Ean13 | 3663952318721 |
| Diametro interno | 60.325 mm |
| Diametro esterno | 130.175 mm |
| Spessore | 36.512 mm |
| Imballaggio | 1 |

contatto@123cuscinetti.it

+33 3 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE