


## Cuscinetti conico 6454-6420-TIMKEN - 6454-6420-TIMKEN

<https://www.123cuscinetti.it/cuscinetti-supporti/cuscinetti-rulli/conico/6454-6420-timken>

**TAPERED ROLLER BEARINGS**  
SINGLE-ROW • TYPE TS

**TYPE TS**

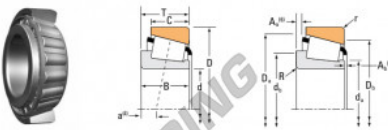

Bearing Dimensions			Load Ratings						Part Number	
Bore d	O.D. D	Width T	Dynamic <sup>(1)</sup> C <sub>1</sub>	Factor <sup>(2)</sup> Y	Dynamic <sup>(1)</sup> C <sub>2</sub>	Factor <sup>(2)</sup> X	Static <sup>(3)</sup> C <sub>0</sub>	Inner	Outer	
mm	mm	mm	N		N		N			
69.850	149.225	53.975	41100	1.08	107000	69000	1.61	403000	6420	
2.750	5.8750	2.125	52400		24000	14800		104000		

Bearing Dimensions										Geometry Factors			Bearing Weight	
Shaft					Housing					Cage	G <sub>1</sub>	G <sub>2</sub>		C <sub>3</sub>
Width B	Width C	ER. Dr. α <sup>(1)</sup>	Max Shaft Fillet Radius R <sup>(1)</sup>	Backing Shoulder Dia. d <sub>1</sub>	Max Housing Fillet Radius r <sup>(1)</sup>	Backing Shoulder Dia. D <sub>1</sub>	A <sub>1</sub> <sup>(1)</sup>	A <sub>2</sub> <sup>(1)</sup>	A <sub>3</sub> <sup>(1)</sup>				G <sub>1</sub>	
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg	
54.225	44.450	-15.8	5.8	85.8	84.8	3.3	148.8	126.8	2.7	8.7	158.3	25.1	0.0021	4.54
2.1250	1.7500	-0.58	0.20	3.25	3.75	0.13	5.91	5.08	0.10	0.03			10.01	

### CARATTERISTICHE DEL PRODOTTO

Marchio	TIMKEN
N° Ean13	3663952320717
Diametro interno	69.85 mm
Diametro esterno	149.225 mm
Spessore	53.975 mm
Imballaggio	1

[contatto@123cuscinetti.it](mailto:contatto@123cuscinetti.it)

+33 3 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE