


## Cuscinetti conico J594X-592A-TIMKEN - J594X-592A-TIMKEN

<https://www.123cuscinetti.it/cuscinetti-supporti/cuscinetti-rulli/conico/j594x-592a-timken>

**TAPERED ROLLER BEARINGS**  
SINGLE-ROW • TYPE TS

**TYPE TS**

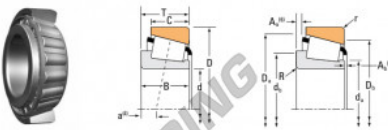

Bearing Dimensions			Load Ratings					Part Number		
Bore d	O.D. D	Width T	Dynamic <sup>(1)</sup> C <sub>1</sub>	Factor <sup>(2)</sup> e	Dynamic <sup>(3)</sup> C <sub>2</sub>	Factor <sup>(4)</sup> K	Static C <sub>0</sub>	Inner	Outer	
mm	mm	mm	N		N		N			
95.000	152.400	39.688	21600	1.26	5000	4200	1.32	31900	J594K	592A
3.7402	6.0000	1.5625	4800		1300	930		7100		

Bearing Dimensions										Geometry Factors			Bearing Weight	
Width		Shaft		Housing		Cage								
B	C	ER. Dr. a <sup>(1)</sup>	Max Shaft Fillet Radius R <sup>(2)</sup>	Backing Shoulder Dia. d <sub>s</sub>	Max Housing Fillet Radius r <sup>(3)</sup>	Backing Shoulder Dia. D <sub>s</sub>	A <sub>1</sub> <sup>(4)</sup>	A <sub>2</sub> <sup>(5)</sup>	G <sub>1</sub>	G <sub>2</sub>	C <sub>3</sub>			
mm	mm	mm	mm	mm	mm	mm	mm	mm				kg		
36.322	36.902	2.5	0.8	103.0	119.0	3.3	144.0	136.0	4.1	1.3	151.4	36.3	0.1418	2.43
1.4300	1.4525	0.10	0.31	4.06	4.69	0.13	5.67	5.31	0.16	0.07				5.35

### CARATTERISTICHE DEL PRODOTTO

Marchio	TIMKEN
N° Ean13	3663952323572
Diametro interno	95 mm
Diametro esterno	152.4 mm
Spessore	39.688 mm
Imballaggio	1

[contatto@123cuscinetti.it](mailto:contatto@123cuscinetti.it)

+33 3 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE