


## Cuscinetti conico

### XAA33212-33212-TIMKEN - XAA33212-33212-TIMKEN

<https://www.123cuscinetti.it/cuscinetti-supporti/cuscinetti-rulli/conico/xaa33212-33212-timken>

**TAPERED ROLLER BEARINGS**  
SINGLE-ROW • IsoClass

**IsoClass**

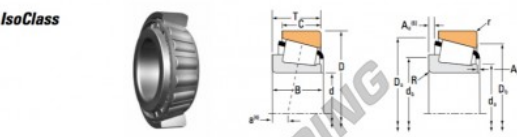

Bearing Dimensions			Load Ratings						Part Number	
Bore d	O.D. D	Width T	Dynamic <sup>(1)</sup> C <sub>1</sub>	Factor <sup>(2)</sup> e	Dynamic <sup>(3)</sup> C <sub>2</sub>	Factor <sup>(4)</sup> K	Static C <sub>0</sub>	Assembly Inner/Outer		
mm	mm	mm	N		N		N			
in.	in.	in.	kN		kN		kN			
60.000	110.000	38.000	23000	0.6	60700	1.44	25300	XAA33212/33212		
2.3622	4.3307	1.4961	52700		13700		9860			

Bearing Dimensions										Geometry Factors		Bearing Weight
Shaft					Housing					C <sub>1</sub>	C <sub>2</sub>	
Width B	Width C	ER Cr. a <sup>(1)</sup>	Max Shaft Fillet Radius R <sup>(2)</sup>	Backing Shoulder Dia. d <sub>s</sub>	Max Housing Fillet Radius r <sup>(3)</sup>	Backing Shoulder Dia. D <sub>s</sub>	Cage A <sub>1</sub> <sup>(4)</sup>	A <sub>2</sub> <sup>(5)</sup>	G <sub>1</sub>			G <sub>2</sub>
mm	mm	mm	mm	mm	mm	mm	mm	mm			kg	
in.	in.	in.	in.	in.	in.	in.	in.	in.			lb	
38.000	29.000	-0.5	0.8	60.0	1.5	100.0	2.0	2.5	76.2	20.0	0.076	1.59
1.4961	1.1417	-0.39	0.24	2.36	0.06	4.13	3.94	0.15	0.10		3.37	

## CARATTERISTICHE DEL PRODOTTO

Marchio	TIMKEN
N° Ean13	3663952353456
Diametro interno	60 mm
Diametro interno	2.362" inch
Diametro esterno	110 mm
Diametro esterno	4.331" inch
Spessore	38 mm
Spessore	1.496" inch
Imballaggio	1

[contatto@123cuscinetti.it](mailto:contatto@123cuscinetti.it)

+33 3 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE