


Cuscinetti conico

XA33116-Y33116-TIMKEN - XA33116-Y33116-TIMKEN

<https://www.123cuscinetti.it/cuscinetti-supporti/cuscinetti-rulli/conico/xa33116-y33116-timken>

TAPERED ROLLER BEARINGS
SINGLE-ROW • IsoClass

IsoClass

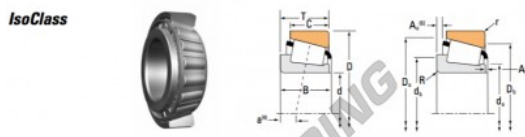

Bearing Dimensions			Load Ratings						Part Number	
Bore d	O.D. D	Width T	Dynamic ⁽¹⁾ C ₁	Factor ⁽²⁾ e	Dynamic ⁽³⁾ C ₂	Factor ⁽³⁾ K	Static C ₀	Assembly Inner/Outer		
mm	mm	mm	N		N		N			
in.	in.	in.	lbf		lbf		lbf			
80.000	130.000	37.000	247000	0.62	64100	1.40	300000	XA33116/Y33116		
3.1496	5.1181	1.4567	55600	1.44	14400	1.40	67300			

Bearing Dimensions										Geometry Factors		Bearing Weight
Shaft					Housing					C ₁	C ₂	
Width B	Width C	ER Dr. a ⁽⁴⁾	Max Shaft Fillet Radius r ⁽⁵⁾	Backing Shoulder Dia. d _s	Max Housing Fillet Radius r ⁽⁶⁾	Backing Shoulder Dia. D _s	Cage A ₁ ⁽⁷⁾	A ₂ ⁽⁷⁾	G ₁			G ₂
mm	mm	mm	mm	mm	mm	mm	mm	mm			kg	
in.	in.	in.	in.	in.	in.	in.	in.	in.			lbm	
37.000	29.000	-0.1	0.0	89.0	1.5	125.0	119.0	3.4	2.5	121.6	37.9	0.838
1.4567	1.1417	-0.24	0.00	3.50	0.06	4.92	4.69	0.13	0.10			4.52

CARATTERISTICHE DEL PRODOTTO

Marchio	TIMKEN
N° Ean13	3663952353647
Diametro interno	80 mm
Diametro interno	3.15" inch
Diametro esterno	130 mm
Diametro esterno	5.118" inch
Spessore	37 mm
Spessore	1.457" inch
Imballaggio	1

contatto@123cuscinetti.it

+33 3 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE