


Cuscinetti conico

XAA32024X-32024X-TIMKEN - XAA32024X-32024X-TIMKEN

<https://www.123cuscinetti.it/cuscinetti-supporti/cuscinetti-rulli/conico/xaa32024x-32024x-timken>

TAPERED ROLLER BEARINGS
SINGLE-ROW • IsoClass

IsoClass

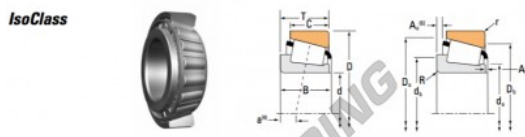

Bearing Dimensions			Load Ratings						Part Number	
Bore d	O.D. D	Width T	Dynami ⁽¹⁾ C ₁	Factor ⁽²⁾ e	Dynami ⁽³⁾ C ₂	Factor ⁽⁴⁾ K	Static C ₀	Assembly Inner/Outer		
mm	mm	mm	N		N		N			
in	in	in	lbf		lbf		lbf			
120.000 4.7244	180.000 7.0866	38.000 1.4961	347000 77900	0.14 1.25	89800 20200	79500 15900	1.27	466000 105000	XAA32024X-32024X	

Mounting Dimensions										Geometry Factors			Bearing Weight		
Shaft					Housing					Cage					
Width B	Width C	ER Co. a ⁽¹⁾	Max Shaft Fillet Radius R ⁽²⁾	Backing Shoulder Dia. d _s	Backing Shoulder Dia. d _e	Max Housing Fillet Radius r ⁽³⁾	Backing Shoulder Dia. D _s	Backing Shoulder Dia. D _e	A ₁ ⁽⁴⁾	A ₂ ⁽⁵⁾	G ₁	G ₂	C ₃	kg	
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	lb
in	in	in	in	in	in	in	in	in	in	in	in	in	in	in	oz
38.000 1.4961	25.000 1.1417	1.5 0.06	5.6 0.23	130.0 5.12	141.6 5.56	2.0 0.08	174.0 6.85	166.0 6.50	3.4 0.13	3.6 0.12	255.1	98.3	0.1189	3.25 7.19	

CARATTERISTICHE DEL PRODOTTO

Marchio	TIMKEN
N° Ean13	3663952353975
Diametro interno	120 mm
Diametro esterno	180 mm
Spessore	38 mm
Imballaggio	1

contatto@123cuscinetti.it

+33 3 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE