


Cuscinetti conico 30226-TIMKEN - 30226-TIMKEN

<https://www.123cuscinetti.it/cuscinetti-supporti/cuscinetti-rulli/conico/30226-timken>

TAPERED ROLLER BEARINGS
SINGLE-ROW • IsoClass

IsoClass

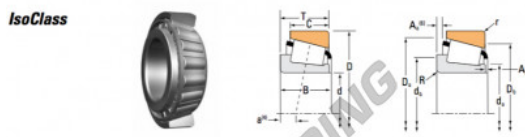

Bearing Dimensions			Load Ratings						Part Number	
Bore d	O.D. D	Width T	Dynamic ⁽¹⁾ C ₁	Factor ⁽²⁾ e	Dynamic ⁽³⁾ C ₂	Factor ⁽⁴⁾ K	Static C ₀	Assembly Inner/Outer		
mm	mm	mm	N		N		N			
in	in	in	lbf		lbf		lbf			
130.000	230.000	43.750	431000	0.84	112000	1.24	950000	30226		
5.1181	9.0551	1.7224	96900		25100		124000			

Mounting Dimensions										Geometry Factors			Bearing Weight	
Drift					Housing					Cage				
Width B	Width C	ER Co. a ⁽¹⁾	Max Shaft Fillet Radius R ⁽²⁾	Backing Shoulder Dia. d _s	Max Housing Fillet Radius r ⁽³⁾	Backing Shoulder Dia. D _s	Backing Shoulder Dia. D _s	A ₁ ⁽⁴⁾	A ₂ ⁽⁵⁾	G ₁	G ₂	C ₃	kg	
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	lbm	
in	in	in	in	in	in	in	in	in	in	in	in	in	oz	
40.800	34.000	2.0	4.0	140.0	100.0	3.0	277.0	290.0	2.0	1.1	287.4	77.1	0.1118	7.06
1.5748	1.3388	0.08	0.16	5.51	3.94	0.12	10.91	11.42	0.08	0.04	11.29	3.03	0.248	0.248

CARATTERISTICHE DEL PRODOTTO

Marchio	TIMKEN
N° Ean13	3663952354002
Diametro interno	130 mm
Diametro interno	5.118" inch
Diametro esterno	230 mm
Diametro esterno	9.055" inch
Spessore	43.75 mm
Spessore	1.722" inch
Peso	7060 g
Carico dinamico	112 kN
Carico statico	83.2 kN
Imballaggio	1
Standard	Nessuno standard

contatto@123cuscinetti.it

+33 3 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE