


Cuscinetti conico

XAA32028X-Y32028X-TIMKEN - XAA32028X-Y32028X-TIMKEN

<https://www.123cuscinetti.it/cuscinetti-supporti/cuscinetti-rulli/conico/xaa32028x-y32028x-timken>

TAPERED ROLLER BEARINGS
SINGLE-ROW • IsoClass

IsoClass

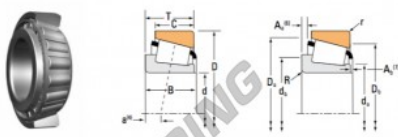

| Bearing Dimensions | | | Load Ratings | | | | | | Part Number | |
|--------------------|---------|---------|--------------------------------------|-------------------------|---------------------------------------|-------------------------|-----------------------|----------------------|-------------------|--|
| Bore d | O.D. D | Width T | Dynami ⁽¹⁾ C ₁ | Factor ⁽²⁾ e | Dynami ⁽³⁾ C _{2e} | Factor ⁽⁴⁾ K | Static C ₀ | Assembly Inner/Outer | | |
| mm | mm | mm | N | | N | | N | | | |
| 140.000 | 210.000 | 45.000 | 30300 | 0.64 | 19200 | 8000 | 1.27 | 94000 | XAA32028X/Y32028X | |
| 5.5118 | 8.2677 | 1.7717 | 88400 | | 22900 | 18000 | | 145000 | | |

| Mounting Dimensions | | | | | | | | | | Geometry Factors | | | Bearing Weight | |
|---------------------|---------|-------------------------|--|--------------------------------------|--|--------------------------------------|--------------------------------------|-------------------------------|-------------------------------|------------------|----------------|----------------|----------------|------|
| Shaft | | | | | Housing | | | | | Cage | | | | |
| Width B | Width C | ER Co. a ⁽¹⁾ | Max Shaft Fillet Radius R ⁽²⁾ | Backing Shoulder Dia. d _s | Max Housing Fillet Radius r ⁽³⁾ | Backing Shoulder Dia. D _s | Backing Shoulder Dia. D ₂ | A ₁ ⁽⁴⁾ | A ₂ ⁽⁵⁾ | G ₁ | G ₂ | C ₃ | | |
| mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | kg | |
| 45.000 | 34.000 | 1.4 | 0.5 | 101.0 | 100.0 | 2.0 | 201.0 | 100.0 | 3.0 | 2.0 | 204.2 | 108.2 | 0.1049 | 5.25 |
| 1.7717 | 1.3308 | 0.05 | 0.20 | 5.94 | 6.22 | 0.08 | 7.85 | 7.60 | 0.15 | 0.08 | | | 11.54 | |

CARATTERISTICHE DEL PRODOTTO

| | |
|------------------|---------------|
| Marchio | TIMKEN |
| N° Ean13 | 3663952354026 |
| Diametro interno | 140 mm |
| Diametro esterno | 210 mm |
| Spessore | 45 mm |
| Imballaggio | 1 |

contatto@123cuscinetti.it

+33 3 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE