


Cuscinetti conico 395A-394D-TIMKEN - 395A-394D-TIMKEN

<https://www.123cuscinetti.it/cuscinetti-supporti/cuscinetti-rulli/conico/395a-394d-timken>

TAPERED ROLLER BEARINGS
DOUBLE-ROW • TYPE TDO

TYPE TDO

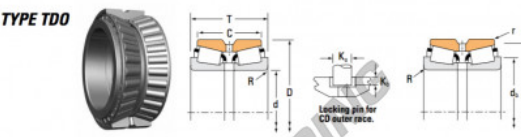

Bearing Dimensions				Load Ratings							
Bore d	O.D. D	Width T	Double Outer Ring Width C	Dynamic ⁽¹⁾		Static ⁽²⁾		Dynamic ⁽³⁾		Factor ⁽⁴⁾	
mm	mm	mm	mm	C ₁₀	N	C ₀	N	C ₉₀	N	C ₅₀	K
66.675	110.000	52.388	46.038	17200	17000	0.40	1.58	2.50	2500	1700	1.45
2.625	4.307	2.025	1.6125	38700	38700				5700	3970	

Part Number		Dimensions						Pin		Geometry Factors			Bearing Weight
Inner	Outer	Max. Shaft Fillet Radius R ₁	Backing Shoulder Dia. d ₁	Max. Housing Fillet Radius r ₁	Backing Shoulder Dia. D ₁	K ₁	K ₂	G ₁	G ₂	C ₁	C ₂		
395A	394D	0.8	75.0	0.8	104.4	—	—	58.0	21.4	0.0084	1.76	3.89	
		0.03	2.87	0.03	4.11	—	—						

CARATTERISTICHE DEL PRODOTTO

Marchio	TIMKEN
N° Ean13	3663952357157
Diametro interno	66.675 mm
Diametro esterno	110 mm
Spessore	52.388 mm
secondo spessore	46.038 mm
Peso	1709 g
Imballaggio	1
Standard	Nessuno standard

contatto@123cuscinetti.it

+33 3 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE