


Cuscinetti conico

96825-96140CD-TIMKEN - 96825-96140CD-TIMKEN

<https://www.123cuscinetti.it/cuscinetti-supporti/cuscinetti-rulli/conico/96825-96140cd-timken>

TAPERED ROLLER BEARINGS
DOUBLE-ROW • TYPE TDO

TYPE TDO

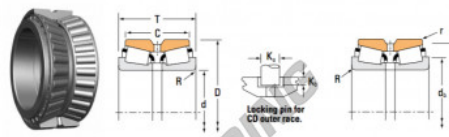

| Bearing Dimensions | | | | Load Ratings | | | | | | | | |
|--------------------|---------|---------|---------------------------|------------------------|-----------------|-----------------------|-----------------|------------------------|-----------------|-----------------------|--------|------|
| Bore d | O.D. D | Width T | Double Outer Ring Width C | Dynamic ⁽¹⁾ | | Static ⁽²⁾ | | Dynamic ⁽³⁾ | | Factor ⁽⁴⁾ | | |
| mm | mm | mm | mm | C ₁₀ | C ₉₀ | N ₁₀ | N ₆₀ | C ₁₀ | C ₅₀ | C ₁₀₀ | K | |
| 209.550 | 355.600 | 152.400 | 111.125 | 127000 | 231000 | 0.53 | 1.14 | 1.70 | 197000 | 100000 | 343000 | 0.55 |
| 9.2500 | 14.0000 | 6.0000 | 4.3750 | | | | | | 44200 | 44700 | 77000 | |

| Part Number | | Dimensions | | | | | | Pin | | Geometry Factors | | | Bearing Weight |
|-------------|---------|---|--------------------------------------|---|--------------------------------------|----------------|----------------|----------------|----------------|------------------|----------------|----|----------------|
| Inner | Outer | Max. Shaft Fillet Radius R ₁ | Backing Shoulder Dia. d ₁ | Max. Housing Fillet Radius r ₁ | Backing Shoulder Dia. D ₁ | K ₁ | K ₂ | G ₁ | G ₂ | C ₁ | C ₂ | | |
| mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | kg |
| 96825 | 96140CD | 7.8 | 246.8 | 1.5 | 336.8 | 25.40 | 9.52 | 1140.0 | 160.6 | 0.1626 | | | 52.26 |
| | | 0.28 | 9.89 | 0.06 | 13.15 | 1.00 | 0.38 | | | | | | 120.20 |

CARATTERISTICHE DEL PRODOTTO

| | |
|------------------|---------------|
| Marchio | TIMKEN |
| N° Ean13 | 3663952360782 |
| Diametro interno | 209.55 mm |
| Diametro esterno | 355.6 mm |
| Spessore | 152.4 mm |
| Imballaggio | 1 |

contatto@123cuscinetti.it

+33 3 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE