


Cuscinetti conico

LL475048-LL475011D-TIMKEN - LL475048-LL475011D-TIMKEN

<https://www.123cuscinetti.it/cuscinetti-supporti/cuscinetti-rulli/conico/ll475048-ll475011d-timken>

TAPERED ROLLER BEARINGS
DOUBLE-ROW • TYPE TDO

TYPE TDO

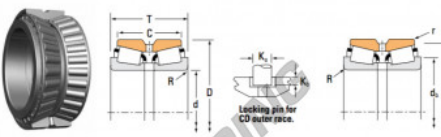

| Bearing Dimensions | | | | Load Ratings | | | | | | | | | |
|--------------------|---------|---------|---------------------------|------------------------|------|-----------------------|----------------|------------------------|-----------------|------------------|-----------------------|---|--|
| Bore d | O.D. D | Width T | Double Outer Ring Width C | Dynamic ⁽¹⁾ | | Static ⁽²⁾ | | Dynamic ⁽³⁾ | | | Factor ⁽⁴⁾ | | |
| mm | mm | mm | mm | C ₁₀ | C | Y ₁ | Y ₂ | C ₉₀ | C ₅₀ | C ₁₀₀ | K | K | |
| 534.988 | 622.300 | 111.125 | 82.930 | 110000 | 0.37 | 1.83 | 2.73 | 173000 | 100000 | 301000 | 1.58 | | |
| 21.6825 | 24.9000 | 4.3750 | 3.2500 | 381000 | | | | 38900 | 24000 | 87700 | | | |

| Part Number | | Shaft | | | | Housing | | | | Pin | | Geometry Factors | | | Bearing Weight |
|-------------|-----------|---|--------------------------------------|---|--------------------------------------|----------------|----------------|----------------|----------------|----------------|----------------|------------------|-----------------|--|----------------|
| Inner | Outer | Max. Shaft Fillet Radius R ₁ | Backing Shoulder Dia. d ₁ | Max. Housing Fillet Radius r ₁ | Backing Shoulder Dia. D ₁ | K ₁ | K ₂ | G ₁ | G ₂ | C ₁ | C ₂ | | | | |
| LL475048 | LL475011D | 3.5 0.14 | 582.8 21.73 | 1.5 0.06 | 488.8 23.98 | - | - | 4985.9 | 1294.0 | 0.2190 | | | 47.79 105.17 | | |

CARATTERISTICHE DEL PRODOTTO

| | |
|------------------|---------------|
| Marchio | TIMKEN |
| N° Ean13 | 3663952366609 |
| Diametro interno | 534.988 mm |
| Diametro esterno | 622.3 mm |
| Spessore | 111.125 mm |
| Imballaggio | 1 |

contatto@123cuscinetti.it

+33 3 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE