


Cuscinetti conico

EE130926TD-131400-TIMKEN - EE130926TD-131400-TIMKEN

<https://www.123cuscinetti.it/cuscinetti-supporti/cuscinetti-rulli/conico/ee130926td-131400-timken>

TAPERED ROLLER BEARINGS
DOUBLE-ROW • TYPE TDIT

TYPE TDIT

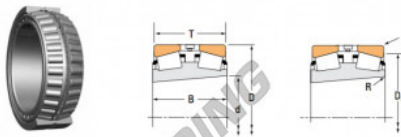

| Bearing Dimensions | | | | Load Ratings | | | | | | | | |
|--------------------|-------|--------------------|-------------------|---------------------------|--------------------------------------|-------------------------------------|-------------------------------------|--------------------------------------|--------------------------------------|------------------------|---------------|------|
| Bore d | Taper | O.D. D | Width T | Double Inner Ring Width B | Dynami ¹⁾ C ₁₀ | Factor ²⁾ Y ₁ | Factor ²⁾ Y ₂ | Dynami ³⁾ C ₉₀ | Dynami ³⁾ C ₅₀ | Factor ³⁾ K | | |
| mm | | mm | mm | mm | N | | | N | N | | | |
| 234.950 9.2500 | 1:12 | 355.600 14.0000 | 165.100 6.5000 | 165.100 6.5000 | 139000 572000 | 0.33 | 2.04 | 2.04 | 26600 46400 | 117000 26200 | 30900 8560 | 1.77 |

| Part Number | | Shaft | | | Housing | | | Geometry Factors | | | Bearing Weight |
|-------------|--------|--|--|--|---------------------------------------|----------------|----------------|------------------|--|-----------------|----------------|
| Inner | Outer | Min Shaft Fillet Radius r _f | Max Shaft Fillet Radius r _f | Max Housing Fillet Radius r _f | Backling Shoulder Dia. D _s | G ₁ | G ₂ | C ₃ | | kg | |
| mm | mm | mm | mm | mm | mm | | | | | lbm | |
| EE130926TD | 131400 | 1.5 | 1.5 | 0.96 | 205.8 | 1162.0 | 107.6 | 0.1058 | | 36.05 113.66 | |

CARATTERISTICHE DEL PRODOTTO

| | |
|------------------|---------------|
| Marchio | TIMKEN |
| N° Ean13 | 3663952373348 |
| Diametro interno | 234.95 mm |
| Diametro esterno | 355.6 mm |
| Spessore | 165.1 mm |
| Imballaggio | 1 |

contatto@123cuscinetti.it

+33 3 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE