


Cuscinetti conico NA539-533D-TIMKEN - NA539-533D-TIMKEN

<https://www.123cuscinetti.it/cuscinetti-supporti/cuscinetti-rulli/conico/na539-533d-timken>

TAPERED ROLLER BEARINGS
DOUBLE-ROW • TYPE TNA

TYPE TNA

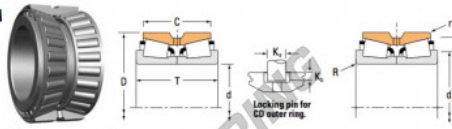

| Bearing Dimensions | | | | Load Ratings | | | | | | | | | |
|--------------------|---------|---------|---------------------------|--|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|--|--|--------------------------------------|-------------------------|--|
| Bore d | O.D. D | Width T | Double Outer Ring Width C | Dynamic ⁽¹⁾ C ₁₀ | Static ⁽¹⁾ C ₀ | Factor ⁽²⁾ Y ₁ | Factor ⁽²⁾ Y ₂ | Factor ⁽²⁾ Y ₃ | Dynamic ⁽¹⁾ C ₉₀ | Dynamic ⁽¹⁾ C ₅₀ | Static ⁽¹⁾ C ₀ | Factor ⁽²⁾ K | |
| mm | mm | mm | mm | N | N | | | | N | N | N | | |
| 53.975 | 111.125 | 79.375 | 63.508 | 30000 | 81400 | 0.30 | 2.28 | 3.39 | 4600 | 22700 | 77700 | 1.97 | |
| 2.1250 | 4.3750 | 3.1250 | 2.5006 | | | | | | 10000 | 9090 | 17900 | | |

| Part Number | | Shaft | | | | Housing | | | | Pin | Bearing Weight |
|-------------|-------|--|--------------------------------------|--|--------------------------------------|----------------|----------------|----------------|------|-----|----------------|
| Inner | Outer | Max Shaft Fillet Radius R ⁽⁴⁾ | Backing Shoulder Dia. d _s | Max Housing Fillet Radius r ⁽⁴⁾ | Backing Shoulder Dia. D _s | K _a | K _b | K _c | | | |
| mm | mm | mm | mm | mm | mm | mm | mm | mm | kg | | |
| NA539 | 533D | 3.5 | 68.8 | 1.6 | 100.0 | - | - | - | 2.36 | | |
| | | 0.14 | 2.68 | 0.08 | 2.94 | - | - | - | 7.38 | | |

CARATTERISTICHE DEL PRODOTTO

| | |
|------------------|---------------|
| Marchio | TIMKEN |
| N° Ean13 | 3663952373881 |
| Diametro interno | 53.975 mm |
| Diametro esterno | 111.125 mm |
| Spessore | 79.375 mm |
| Imballaggio | 1 |

contatto@123cuscinetti.it

+33 3 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE