


## Cuscinetti a rullini NAF659530-IKO - NAF659530-IKO

<https://www.123cuscinetti.it/cuscinetti-supporti/cuscinetti-rullini/rullini/naf659530-iko>

**IKO**  
**NEEDLE ROLLER BEARINGS WITH SEPARABLE CAGE**  
With Inner Ring

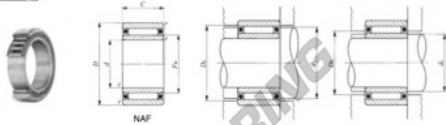

Shaft dia. mm	Identification number	Mass (Ref.) g	Boundary dimensions mm					Standard mounting dimensions mm				
			d	D	C	r <sub>s</sub> min <sup>(1)</sup>	F <sub>w</sub>	d <sub>b</sub>	D <sub>s</sub> Max.	d <sub>s</sub> Min.	D <sub>s</sub> Max.	
65	NAF 659530	790	65	95	30	1.5	75	82	87	73	73.5	76
Basic dynamic load rating C		Basic static load rating C <sub>0</sub>		Allowable rotational speed <sup>(2)</sup>		Assembled outer ring						
N		N		rpm		LRT 657530						
63 100		144 000		6 500								

Notes: (1) Minimum allowable value of chamfer dimension r  
(2) Allowable rotational speed applies to grease lubrication.  
Remarks: The outer ring has an oil groove and an oil hole.  
2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

## CARATTERISTICHE DEL PRODOTTO

Marchio	IKO
N° Ean13	3663952384832
Diametro interno	65 mm
Diametro esterno	95 mm
Spessore	30 mm
Peso	790 g
Imballaggio	1

[contatto@123cuscinetti.it](mailto:contatto@123cuscinetti.it)

+33 3 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE