


Rotelle con perno CF-RU1-16-IKO - CF-RU1-16-IKO

<https://www.123cuscinetti.it/cuscinetti-supporti/cuscinetti-sfera/rotelle-perno/cf-ru1-16-iko>

IKO

CAM FOLLOWERS

Centralized Lubrication Type Cam Followers With Cage/With Screwdriver Slot

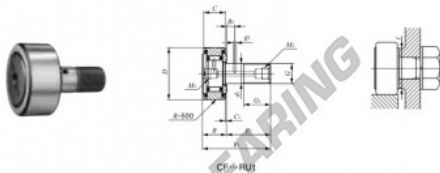

| Stud dia. mm | Identification number | | Mass (Ref.) g | Boundary dimensions mm | | | | |
|-----------------|----------------------------|--------------------------------|---------------------|------------------------|----|----------------|-----------|----------------|
| | With crowned outer ring | With cylindrical outer ring | | D | C | d ₁ | G | G ₁ |
| 16 | CF-RU1-16 | | 170 | 35 | 18 | 16 | M16 x 1.5 | 17 |

| B _{max} | B _{1max} | B ₂ | B ₃ | C ₁ | g ₂ | M ₁ | M ₂ | f ₆ min ⁽¹⁾ | Mounting dimension f Min. mm | Maximum tightening torque N-m | Basic dynamic load rating C N | Basic static load rating C ₀ N | Maximum allowable static load N |
|------------------|-------------------|----------------|----------------|----------------|----------------|----------------|----------------|-----------------------------------|--|--|--|--|--|
| 19.6 | 52.1 | 32.5 | 8 | 0.8 | 3 | PT 1/8 | PT 1/8 | 0.6 | 26 | 58.5 | 12 000 | 18 300 | 18 300 |

CARATTERISTICHE DEL PRODOTTO

| | |
|------------------|---------------|
| Marchio | IKO |
| N° Ean13 | 3616060461636 |
| Diametro interno | 16 mm |
| Diametro esterno | 35 mm |
| Spessore | 18 mm |
| Peso | 170 g |
| Imballaggio | 1 |

contatto@123cuscinetti.it

+33 3 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE