


## Cuscinetti a rulli NNU4944-JTEKT - NNU4944-KOYO

<https://www.123cuscinetti.it/cuscinetti-supporti/cuscinetti-rulli/rulli/nnu4944-koyo>

Double-row cylindrical roller bearings 

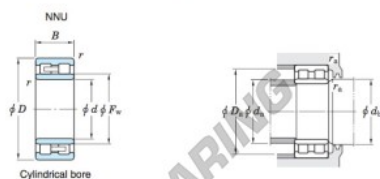

Boundary dimensions (mm)				Basic load ratings (kN)			Limiting speeds (min <sup>-1</sup> )		Bearing No.	
d	D	B	r	F <sub>w</sub>	E <sub>a</sub>	C <sub>10</sub>	C <sub>02</sub>	Grease lub.	Oil lub.	NN Cylindrical bore Tapered bore
220	300	80	2.1	244	—	501	1 220	1 700	2 000	

Mounting dimensions (mm)		Cylindrical bore		Tapered bore		Refer. Mass (kg)	
d <sub>a</sub>	D <sub>a</sub>	min.	max.	min.	max.	Cylindrical bore	Tapered bore
231	241	248	289	—	2	16.7	16.0

### CARATTERISTICHE DEL PRODOTTO

Marchio	JTEKT
N° Ean13	3663952473437
Diametro interno	220 mm
Diametro esterno	300 mm
Spessore	80 mm
Peso	16700 g
Imballaggio	1

[contatto@123cuscinetti.it](mailto:contatto@123cuscinetti.it)

+33 3 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE