


Cuscinetti assiali a rullini AZK801057.5-IKO - AZK801057.5-IKO

<https://www.123cuscinetti.it/cuscinetti-supporti/cuscinetti-rullini/assiali-rullini/azk801057.5-iko>

IKO
THRUST BEARINGS
Thrust Roller Bearings

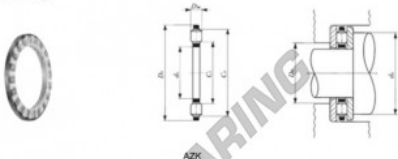

Shaft dia. mm	Identification number						
	Thrust roller bearing	Mass (Ref.) g	Thrust roller bearing	Mass (Ref.) g	Inner ring	Outer ring	Mass (Ref.) g
80	AZ 8010519	495	AZK 801057.5	171	WS 80105	GS 80105	162

Boundary dimensions mm										Standard mounting dimensions mm		Basic dynamic load rating C	Basic static load rating C ₀	Allowable rotational speed ⁽²⁾
d	D	T	d _c	D _c	D _w	B	r _s (1)	C ₁	C ₂	d ₄ Min.	D ₄ Max.	N	N	rpm
80	105	19	80.05	104.5	7.5	5.75	1	85	101	101	86	74 500	292 000	3 000

Notes: (1) Minimum allowable value of chamfer dimension r
(2) Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 25% of this value is allowable.

CARATTERISTICHE DEL PRODOTTO

Marchio	IKO
N° Ean13	3663952487106
Diametro interno	80 mm
Diametro esterno	105 mm
Spessore	7.5 mm
Peso	171 g
Imballaggio	1

contatto@123cuscinetti.it

+33 3 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE