


Cuscinetti assiali a rullini AZK10015015-IKO - AZK10015015-IKO

<https://www.123cuscinetti.it/cuscinetti-supporti/cuscinetti-rullini/assiali-rullini/azk10015015-iko>

IKO
THRUST BEARINGS
Thrust Roller Bearings

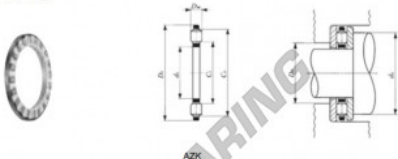

Shaft dia. mm	Identification number							
	Thrust roller bearing	Mass (Ref.) g	Thrust roller bearing	Mass (Ref.) g	Inner ring	Outer ring	Mass (Ref.) g	
100	AZ 10015038	2 720	AZK 10015015	980	WS 100150	GS 100150	870	

Boundary dimensions mm										Standard mounting dimensions mm		Basic dynamic load rating C	Basic static load rating C ₀	Allowable rotational speed ⁽²⁾
d	D	T	d _c	D _c	D _w	B	r _s (1)	C ₁	C ₂	d _s Min.	D _s Max.	N	N	rpm
100	150	38	100.05	149.5	15	11.5	1.1	112	143	142	113	219 000	796 000	2 500

Notes: (1) Minimum allowable value of chamfer dimension r.
(2) Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 25% of this value is allowable.

CARATTERISTICHE DEL PRODOTTO

Marchio	IKO
N° Ean13	3616060466167
Diametro interno	100 mm
Diametro esterno	150 mm
Spessore	15 mm
Peso	980 g
Imballaggio	-

contatto@123cuscinetti.it

+33 3 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE