


Cuscinetti assiali a rullini AZK17023019-IKO - AZK17023019-IKO

<https://www.123cuscinetti.it/cuscinetti-supporti/cuscinetti-rullini/assiali-rullini/azk17023019-iko>

IKO
THRUST BEARINGS
Thrust Roller Bearings

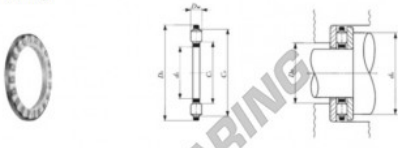

| Shaft dia. mm | Identification number | | | | | | |
|---------------|-----------------------|---------------|-----------------------|---------------|------------|------------|---------------|
| | Thrust roller bearing | Mass (Ref.) g | Thrust roller bearing | Mass (Ref.) g | Inner ring | Outer ring | Mass (Ref.) g |
| 170 | AZ 17023045 | 6 220 | AZK 17023019 | 2 420 | WS 170230 | GS 170230 | 1 900 |

| Boundary dimensions mm | | | | | | | | | | Standard mounting dimensions mm | | Basic dynamic load rating C | Basic static load rating C ₀ | Allowable rotational speed ⁽²⁾ |
|------------------------|-----|----|----------------|----------------|----------------|----|--------------------|----------------|----------------|---------------------------------|---------------------|-----------------------------|---|---|
| d | D | T | d _c | D _c | D _w | B | r _s (1) | C ₁ | C ₂ | d ₄ Min. | D ₄ Max. | N | N | rpm |
| 170 | 230 | 45 | 170.1 | 229 | 19 | 13 | 1.5 | 183 | 221 | 220 | 184 | 406 000 | 1 730 000 | 1 500 |

Notes: (1) Minimum allowable value of chamfer dimension r.
(2) Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 25% of this value is allowable.

CARATTERISTICHE DEL PRODOTTO

| | |
|------------------|---------------|
| Marchio | IKO |
| N° Ean13 | 3616060466761 |
| Diametro interno | 170 mm |
| Diametro esterno | 230 mm |
| Spessore | 19 mm |
| Peso | 2420 g |
| Imballaggio | 1 |

contatto@123cuscinetti.it

+33 3 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE