

Teste a snodo TAPR DGIHN-KL-12LO-DURBAL - DGIHN-KL-12LO-DURBAL


<https://www.123cuscinetti.it/cuscinetti-supporti/teste-snodo/tapr/dgihn-kl-12lo-durbal>

DGIHN-KL-12LO



Description: Hydraulic rod end with slot and clamping arrangement. Made of spherical plain bearing DGE... LO pressed into rod end housing. Sliding combination steel / steel with grease nipple.

* without grease nipple

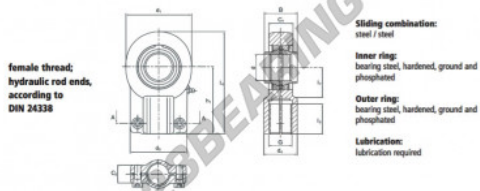

female thread:
hydraulic rod ends,
according to
DIN 24338

Sliding combination:
steel / steel
Inner ring:
bearing steel, hardened, ground and
phosphated
Outer ring:
bearing steel, hardened, ground and
phosphated
Lubrication:
lubrication required

order number	right hand thread	left hand thread	measurement [mm]					
	d	d ₁	G	d ₂	B	C ₁	C ₂	
DGIHN-KL 12 LO*	12	32	M 12 x 1,25	16,5	32	12	11	

type	l ₁ min	measurement [mm]		l ₂	load rating	weight
		h ₁	l ₂	l ₁	C ₀ [kN]	[kg]
DGIHN-K / DGIHN-KL 12 LO*	17	38	54,0	14	24,5	0,10

CARATTERISTICHE DEL PRODOTTO

Marchio	DURBAL
N° Ean13	3663952500041
Diametro interno	12 mm
Diametro esterno	32 mm
Spessore	11 mm
Tipo	TAPR
Peso	100 g
Il filo	Filetto sinistro
Lubrificazione	con
Imballaggio	1

contatto@123cuscinetti.it

+33 3 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE