

Teste a snodo TAPR GIHN-K-32LO-DURBAL - GIHN-K-32LO-DURBAL


<https://www.123cuscinetti.it/cuscinetti-supporti/teste-snodo/tapr/gihn-k-32lo-durbal>

GIHN-K-32LO



Description: Hydraulic rod end with slot and clamping arrangement. Made of spherical plain bearing DGE. LO pressed into rod end housing. Sliding combination steel / steel with grease nipple.

* without grease nipple

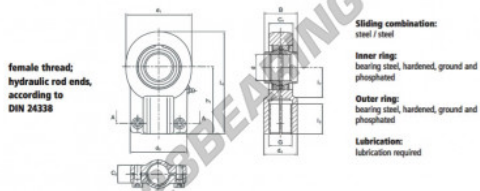

female thread;
hydraulic rod ends,
according to
DIN 24338

Sliding combination:
steel / steel
Inner ring:
bearing steel, hardened, ground and
phosphated
Outer ring:
bearing steel, hardened, ground and
phosphated
Lubrication:
lubrication required

order number	d	d ₁	measurement [mm]	G	d ₂	B	C ₁	C ₂
GIHN-K 32 LO	32	71	M 27 x 2	38,0	66	32	28	22

type	l ₁ min	measurement [mm]	l ₂	l ₃	load rating	weight
		h ₁	l ₂	l ₃	C ₀ [kN]	[kg]
GIHN-K / GIHN-KL 32 LO	37	80	118,5	32	114,0	1,20

CARATTERISTICHE DEL PRODOTTO

Marchio	DURBAL
N° Ean13	3663952500188
Diametro interno	32 mm
Diametro esterno	71 mm
Spessore	28 mm
Tipo	TAPR
Peso	1200 g
Il filo	Filetto destro
Lubrificazione	con
Imballaggio	1

contatto@123cuscinetti.it

+33 3 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE