


## Cuscinetti a rulli NNU4938K-JTEKT - NNU4938K-JTEKT

<https://www.123cuscinetti.it/cuscinetti-supporti/cuscinetti-rulli/rulli/nnu4938k-jtekt>

Double-row cylindrical roller bearings 

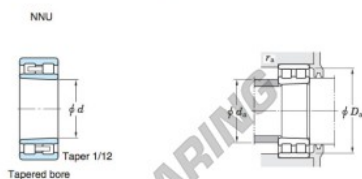

Boundary dimensions (mm)				Basic load ratings (kN)			Limiting speeds (min <sup>-1</sup> )		Bearing No.	
d	D	B	r <sub>min</sub>	F <sub>w</sub>	E <sub>0</sub>	C <sub>10</sub>	C <sub>90</sub>	Grease lub.	Oil lub.	NN Cylindrical bore Tapered bore
190	260	69	2	210	—	405	996	2 000	2 400	

NNU Cylindrical bore Tapered bore	Mounting dimensions (mm)						(Refer.) Mass (kg)	
	d <sub>a</sub> min.	d <sub>a</sub> max.	d <sub>s</sub> min.	d <sub>s</sub> max.	D <sub>s</sub> min.	r <sub>s</sub> max.	Cylindrical bore	Tapered bore
NNU4938K	199	207	215	251	—	2	11.0	10.5

### CARATTERISTICHE DEL PRODOTTO

Marchio	JTEKT
N° Ean13	3663952473369
Diametro interno	190 mm
Diametro esterno	260 mm
Spessore	69 mm
Peso	10500 g
Imballaggio	1

[contatto@123cuscinetti.it](mailto:contatto@123cuscinetti.it)

+33 3 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE